

THE SAFE & RELIABLE

choice for effortless operation and superior durability.

METRO DOCK

HYDRAULIC DOCK LEVELER



Hydraulic Dock Levelers: Simple to use, durable, and cost-effective, with a standard capacity of 30,000 lb. and optional capacities up to 120,000 lb. They feature single push-button operation, constant pressure for added safety, and rear hinge tilt to handle uneven truck load approaches. Built with premium North American components, Metro Dock hydraulic dock levelers come in formed beam or I-beam designs, with 1HP power packs available in any voltage.

FEATURES

Effortless Operation: User-friendly push-button control ensures smooth and efficient performance.

Rear Hinge Tilt: Rear hinge tilt adjusts seamlessly to accommodate uneven truck load approaches.

Premium Quality: Built with durable, North American-made hydraulic components.

Flexible Design: Offered in formed beam and I-beam construction to suit various capacities.

• • • • • • • • • • •

BENEFITS

Enhanced Safety: The constant pressure feature ensures safety throughout the entire operating cycle.

Cost-Efficient: Designed for long-term durability, minimizing downtime and maintenance costs.

Consistent Performance: Operates smoothly across varying temperatures with multi-viscosity oil.

Automatic Fall-Safe Protection: Minimizes the risk of worker injury and equipment damage.

Reliability. Durability. Excellence.

HYDRAULIC DOCK LEVELER STANDARD FEATURES

SPECIFICATIONS

- · 30,000 lb. capacity
- · Formed beam construction
- 16" reach lip
- · Weather seals 3 sides
- 1-HP, any voltage powerpack
- · Full range operating toe guards
- · Single push button control
- · Multi-viscosity oil
- · Fall-safe velocity fuse
- · Maintenance stand
- Inverted hydraulic cylinder

OPTIONS


- Up to 120,000 lb. capacity
- I-beam construction
- 18" and 20" reach lip
- · Remote wall-mounted powerpack
- 6" Roll-off safety lip barrier
- · 3-wheel forklift bracing
- · Upgraded control panels
- · Light communication package
- · Hot dipped galvanized finish
- Additional options available

SAFE RELIABLE CONVENIENT



Lip Hinge & Pin

A high-tensile seamless tube (tensile strength of 96,425 PSI) with a one-piece hinge pin, ensures superior strength and durability.

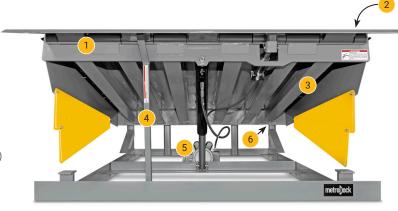



Deck Plate

Minimum 1/4" thick high-tensile checker deck plate used on all dock levelers.



I-Beam

Wide flange I-beam construction on capacities from 40,000 lb. to 120,000 lb.



Maintenance Stand:

Supports the deck and lip for under-deck inspection and maintenance



Hydraulic Powerpack:

Made in North America, with a standard 1HP motor, self-contained adjusting valves and available in any voltage.



Rear Hinge Tilt

Rear hinge tilt adjusts seamlessly to accommodate uneven truck load approaches.

Also Provided by Metro Dock:

- Dock Seals and Shelters
- · Dock Bumpers
- Truck Restraints
- · Dock Accessories
- Dock Planning Options
 Aftermarket Items

For a complete list of Metro Dock products and accessories, please visit: metrodock.com





